



Air-operated oil dispensers

portable

wheel-mounted

Air-operated oil dispensers

suitable for high-viscosity oil.

Filled with oil to 4/5 their capacity and pressurised to 6 - 8 bar, they work independently without requiring connection to the compressed air system.

The air-operated oil dispensers are ideal for filling or topping-up engine, gearbox, differential, hydraulic power pack, reduction unit oil, etc.




Article		33016	33024
Tank capacity	litres	16	24
Working pressure	bar	6 - 8	6 - 8
Safety valve	bar	10	8
Delivery hose length	m	2	2
Gun hose length	m	0,27	0,27
Max oil density delivered	SAE	130	130
Antisplash funnel	Art.	24891	24891
Packing	N° - m³	1 - 0,080	1 - 0,090
Weight	kg	9,9	13,1
Dimensions (A - B - C)	cm	25,5 - 22,5 - 86	28 - 33 - 89

Caution: do not use with flammable or corrosive liquids

Art. 24891

Antisplash funnel.

With antisplash rim to prevent the liquid from spilling out when filling the tank

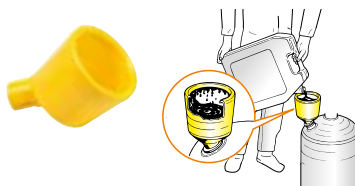

Art. 32713

Digital litre-counter kit with partial and cumulative reading, complete with connection unions.

Application between the pump and delivery hose allows the quantity of oil delivered to be controlled - not type-approved for public use

